

SQA59N30

300V 59A N-Channel Enhancement Mode Power MOSFET

Features

- Advanced Trench Technology
- Typical on-Resistance:
 $R_{DS(on)}=55m\Omega$ @ $V_{GS}=10V$, $I_D=59A$
- Rated Avalanche Energy
- RoHS Compliant



Description

The SQA59N30 is an N-Channel enhancement mode power MOSFET which using proprietary planar stripe and DMOS technology, it has extremely low static on-resistance and high avalanche energy strength. This device provide excellent switching performance for switched mode power supplies.

Applications

- Switched Mode Power Supplies
- Motor Control
- Synchronous Rectification

Package Type & Internal Circuit



Absolute Maximum Ratings @ $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{DSS}	Drain to Source Voltage		300	V
V_{GSS}	Gate to Source Voltage		± 25	V
I_D	Drain Current	$T_C=25^\circ C$	59	A
		$T_C=100^\circ C$	35	A
I_{DM}	Pulsed Drain Current	(Note1)	236	A
P_D	Maximum Power Dissipation	$T_C=25^\circ C$	500	W
	Derate above $25^\circ C$		4	W/ $^\circ C$
E_{AS}	Single Pulsed Avalanche Energy	(Note 2)	2800	mJ
T_J	Operating Junction Temperature Range		-55~+150	$^\circ C$
T_{STG}	Storage Temperature Range		-55~+150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.25	$^\circ C/W$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	$^\circ C/W$

**Electrical Characteristics** @ $T_c=25\text{ }^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	250	-	-	V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	3.0	3.35	4.0	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=10V, I_D=29.5A$	-	55	-	m Ω
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=V_{DSS}, V_{GS}=0V$	-	-	1	μA
I_{GSS}	Gate to Source Leakage Current	$V_{GS}=V_{GSS}, V_{DS}=0V$	-	-	± 100	nA

D-S Diode Characteristics and Maximum Rating @ $T_c=25\text{ }^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Maximum Drain to Source Diode Forward Current		-	-	59	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS}=0V, I_S=59A$	-	1.0	1.2	V
t_{rr}	Reverse Recovery Time	$V_{GS}=0V, I_S=59A,$ $di/dt=-100A/\mu s$	-	245	-	ns
Q_{rr}	Reverse Recovery Charge		-	5.9	-	μC

Switching Characteristics @ $T_c=25\text{ }^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on Delay Time	$I_D=59A,$ $V_{DD}=150V, V_{GS}=10V$ $R_G=25\Omega$ (Note 3)	-	135	-	ns
t_r	Rise Time		-	550	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	120	-	ns
t_f	Fall Time		-	190	-	ns
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=25V,$ $f=1.0MHz$	-	3450	4560	pF
C_{oss}	Output Capacitance		-	650	870	pF
C_{rss}	Reverse Transfer Capacitance		-	78	110	pF
Q_g	Total Gate Charge	$I_D=59A,$ $V_{DS}=240V$ $V_{GS}=10V$ (Note 3)	-	74	-	nC
Q_{gs}	Gate to Source Charge		-	21	-	nC
Q_{gd}	Gate to Drain Charge		-	40	-	nC

Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. $V_{DD}=100V, L=2mH, V_G=10V, I_{AS}=57A$
3. Essentially independent of operating temperature typical characteristics

Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

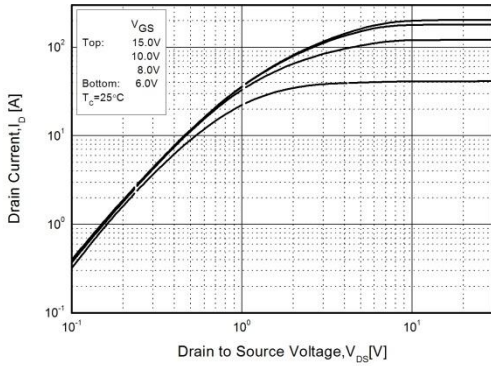


Fig. 2. Typical Transfer Characteristics

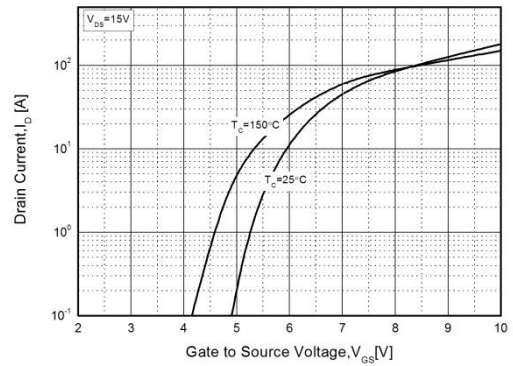


Fig. 3. Static on-Resistance vs. I_D

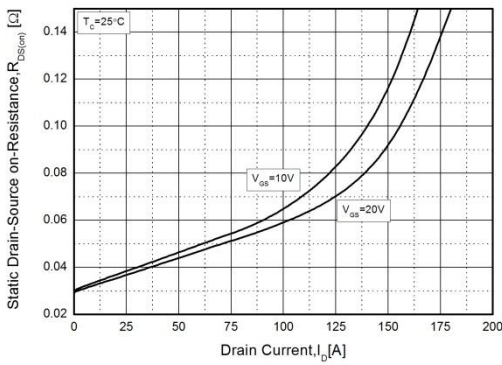


Fig. 4. Body Diode Forward Voltage vs. I_{DR}

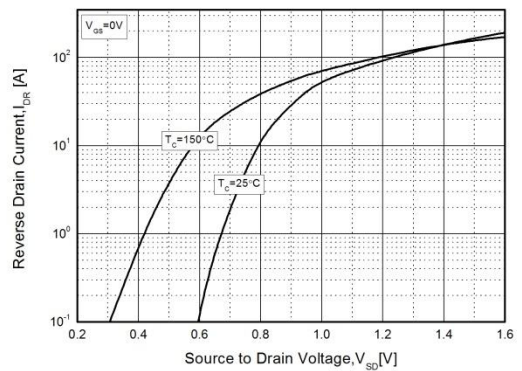


Fig. 5. Capacitance Characteristics


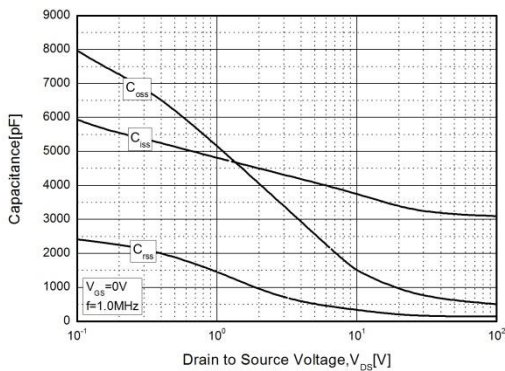


Fig. 6. Gate Charge Characteristics

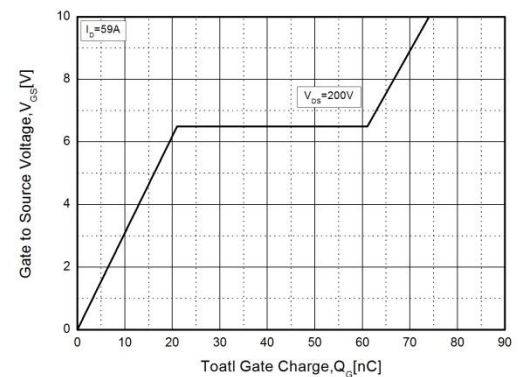

Typical Performance Characteristics

Fig. 7. Breakdown Voltage vs. Temperature

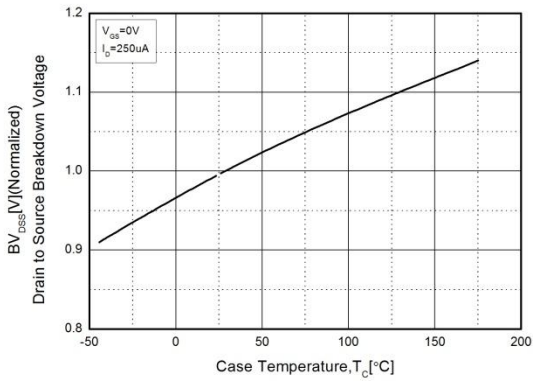


Fig. 8. Static on-Resistance vs. Temperature

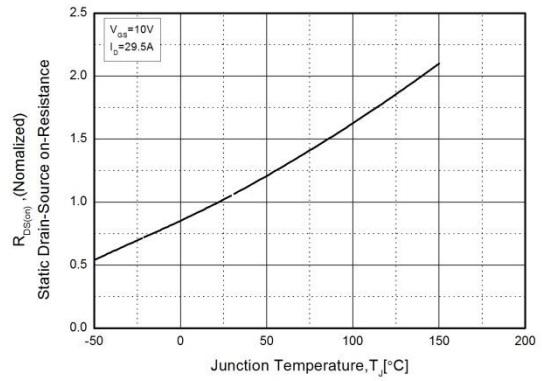


Fig. 9. Maximum Safe Operating Area

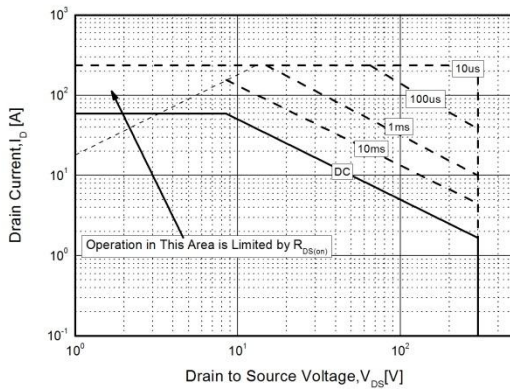


Fig. 10. Maximum Drain Current vs. Temperature


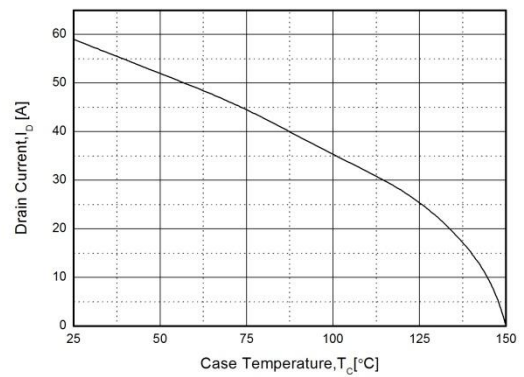



Fig. 11. Transient Thermal Response Curve

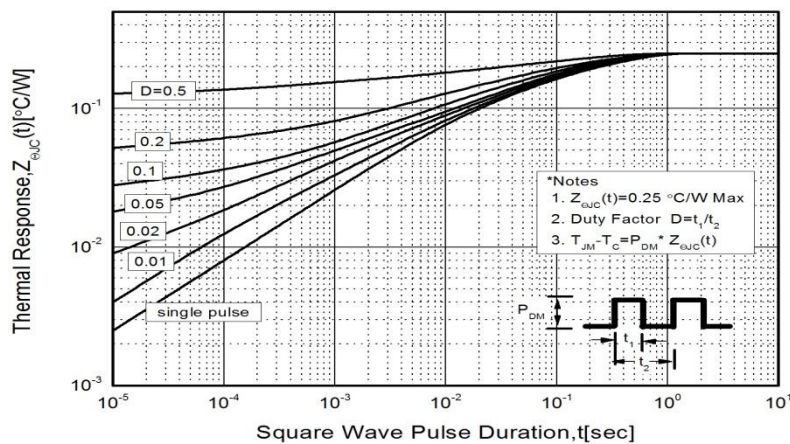

Package Dimensions

TO-3P

(Dimensions in Millimeters)

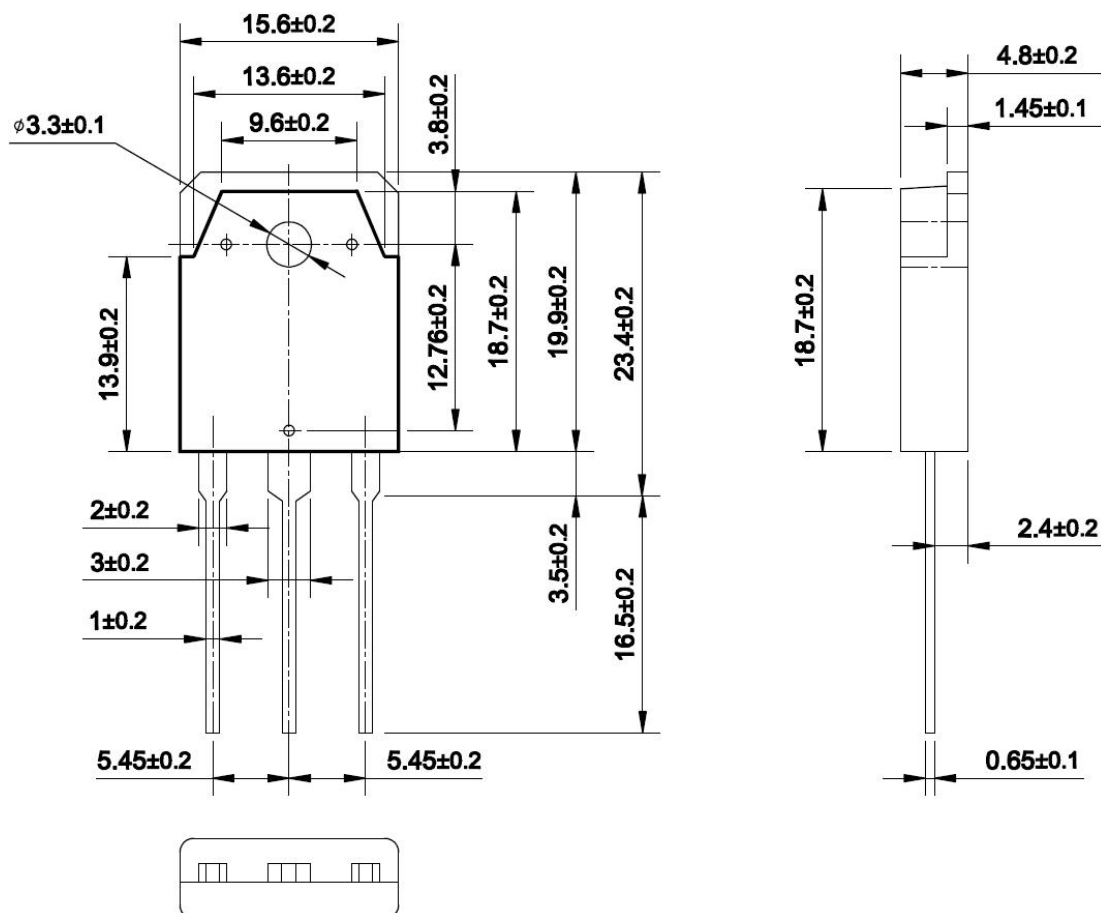

DISCLAIMER:

The products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any product can reasonably be expected to result in a personal injury. Seller's customers using or selling seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Sunnychip reserves the right to change the specifications and circuitry without notice at any time. Sunnychip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Sunnychip product.  is a registered trademark of Sunnychip Semiconductor Co., Ltd.