

SFA90UP20DN

90A, 200V Ultrafast Dual Diode

Features

- Ultrafast Soft Recovery: $T_{rr}=32\text{ns}$ (typ)
- Typical Forward Voltage: $V_F=0.97\text{V}$ @ $I_F=45\text{A}$
- Reverse Voltage: $V_{RRM}=200\text{V}$
- Avalanche Energy Rated



Description

The SFA90UP20DN is an ultrafast dual diode with low forward voltage drop. This device is designed for FWD in motor and power switching applications. It is specially suited for use in switching power supplies and industrial applications as welder and UPS application.

Applications

- Welder & UPS
- Switching Power Supply
- FWD for Motor Application

Package Type & internal Circuit



1. Anode 2. Cathode 3. Anode

Absolute Maximum Ratings at $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{RRM}	Peak Repetitive Reverse Voltage		200	V
V_{RWM}	Working Peak Reverse Voltage		200	V
V_R	DC Blocking Voltage		200	V
$I_{F(AV)}$	Average Rectified Forward Current	at $T_C=120^\circ\text{C}$	45	A
I_{FSM}	Non-repetitive Peak Surge Current		350	A
T_J	Operating Junction Temperature Range		-55~+150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-55~+150	$^\circ\text{C}$

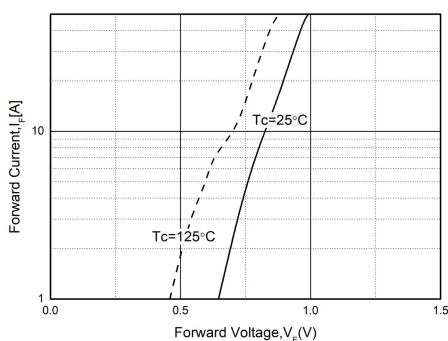
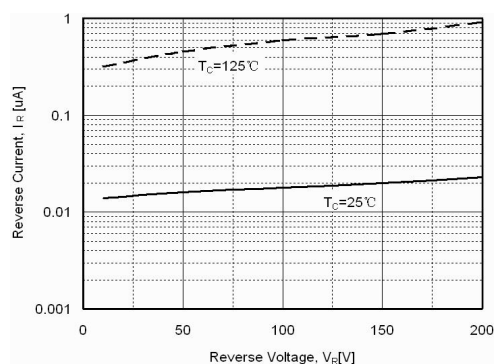
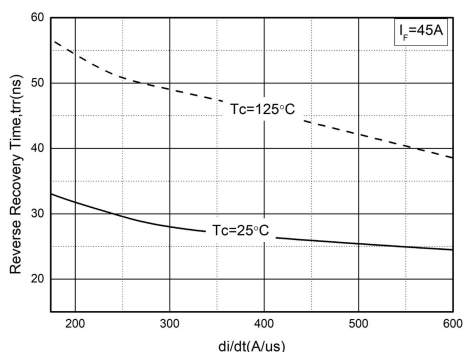
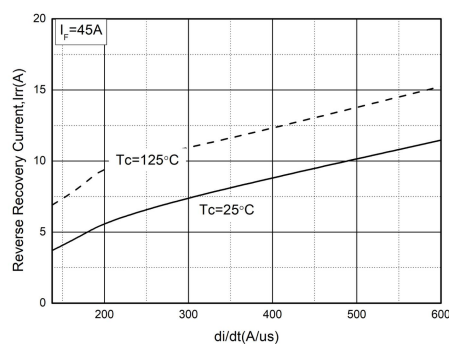
Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.6	$^\circ\text{C/W}$

Electrical Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop	$I_F=45\text{A}$	-	0.97	1.2	V
		$I_F=45\text{A}, T_C=125^\circ\text{C}$	-	0.88	-	V
I_R	Reverse Leakage Current	$V_R=200\text{V}$	-	-	10	μA
T_{rr}	Reverse Recovery Time	$I_F=45\text{A}, di/dt=-200\text{A}/\mu\text{s}$	-	32	45	ns
E_{AS}	Avalanche Energy	$L=5\text{mH}$	800	-	-	mJ

Typical Performance Characteristics

Fig. 1. Typical Characteristics: V_F vs. I_F

Fig. 2. Typical Characteristics: V_R vs. I_R

Fig. 3. Typical Reverse Recovery Time vs. di/dt

Fig. 4. Typical Reverse Recovery Current vs. di/dt


Package Dimensions

TO-3PN

(Dimensions in Millimeters)

